

AL46120

20" Broad Area Linear Array

- 4i** Provides very even illumination along the 531mm length of the light, with controlled "fall off" in the transverse direction.
- 4i** Designed to provide low angle of incidence illumination over a long, wide area.



Ordering Information

Standard Product:
Shipped Next Day

AL46120


P/N: AL46120-660
Configured for use with Ai
Power Supply

Standard Product Variation:
Shipped Within Two Weeks


AL46120	-	Spectral wavelength XXX	Optional power Compatibility XX
(blue)	470†	12	
(green)	520†	24	
(yellow)	590		
(orange)	625		
(red)	660		
(infra-red)	880		
(white)	WHI†		

†Not available in 12v

Light Set Up Diagram

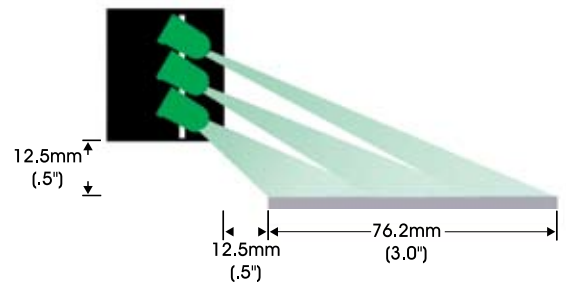

Dimensional Information

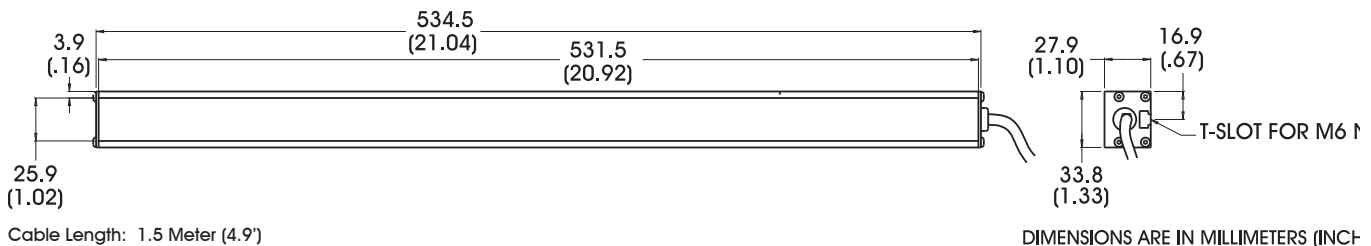

Standard Variation Current Specifications

	(blue)	(green)	(yellow)	(orange)	(red)	(infra-red)	(white)	(RGB)	
@12	N/A	N/A	480	480	720	800	N/A	N/A	mA
@24	420	420	240	240	360	480	420	N/A	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C