

HAMAMATSU

DATA SHEET

BT(Back-thinned)-CCD Cooled Digital Camera ORCA II -BT-512G




▲ Hermetic vacuum sealed air-cooled head type

The ORCA II -BT-512G features an original and unique Hamamatsu S7170 CCD chip packaged in a proprietary permanently sealed vacuum chamber evacuated to 10^{-7} Torr. This high resolution, back thinned, back illuminated CCD offers very high quantum efficiency over the spectrum from 200 nm to 1000 nm. With a huge full well capacity, low read noise and MPP (Multi-Pinned Phase) technology in the drive circuits to reduce dark current, this camera will produce rapid exposures and very high dynamic range images. Dual mode digitization offers a software selectable choice of speed or very low noise readout methods with 12 to 16 bit precision. Special analog contrast enhancement circuits increase versatility for even the most difficult imaging conditions. A high performance serial bus IEEE 1394 is used as a computer interface.


APPLICATIONS

- Luminescence and Fluorescence
- Video microscopy
- Semiconductor imaging
- X-ray applications
- Neutron radiography
- Scintillator readout

SYSTEM CONFIGURATION

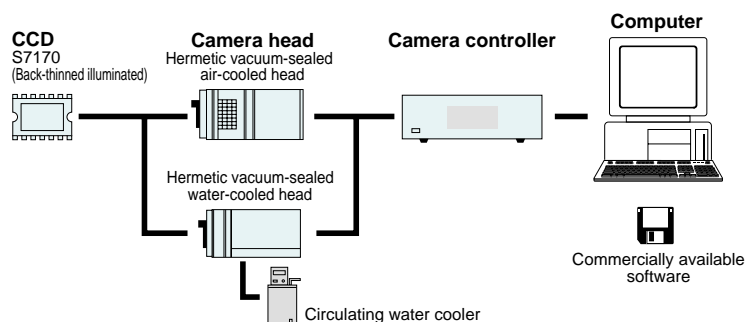

SPECTRAL RESPONSE CHARACTERISTIC

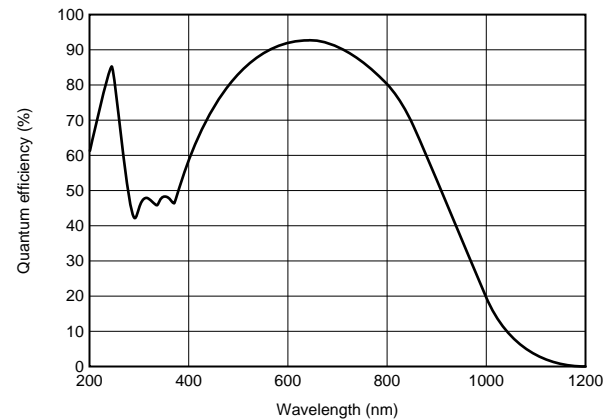

* This is typical, not guaranteed.

FEATURES

- High resolution format (512 × 512 pixels)
- High quantum efficiency from UV to NIR
- Very large full well capacity (230,000 electrons typ.)
- Low readout noise design (7 electrons r.m.s. typ.)
- Software selectable dual digitizers
- Analog contrast enhancement
- Compatible with IIDC 1394-based digital camera specifications
- Full remote control from PC via IEEE 1394 Bus

TYPE NUMBER

C4742-98-□□L□G

Bit number in A/D converter

- 24: High speed readout 12bit
High-precision readout 14 bit
- 26: High speed readout 12bit
High-precision readout 16 bit

Cooling method

- A: Air-cooling
- W: Water-cooling



Hamamatsu is a member of 1394 Trade Association


SPECIFICATIONS

Type number	C4742-98-24LAG	C4742-98-26LAG	C4742-98-24LWG	C4742-98-26LWG
Camera head type	Hermetic vacuum sealed air-cooled head		Hermetic vacuum sealed water-cooled head	
Circulating water cooler (sold separately)	-		Required	
Mechanical shutter	Built-in (Control: OPEN / CLOSE / AUTO)			
Imaging device	S7170 full-frame transfer CCD			
Effective no. of pixels	512 (H) × 512 (V)			
Cell size	24 μm (H) × 24 μm (V)			
Effective area	12.29 mm (H) × 12.29 mm (V)			
Pixel clock rate	156 kHz/pixel (High-precision readout) / 2.5 MHz/pixel (High speed readout)			
Frame rate	0.5 frame/ sec (High-precision readout) / 6.3 frame/sec (High speed readout)			
Readout noise (r.m.s.) (High-precision readout) typ.	7 electrons			
Full well capacity typ.	230 000 electrons			
Dynamic range* (High-precision readout) typ.	32 875 : 1			
Cooling method	Forced air peltier cooling, with hermetic sealing		Water-cooling and peltier cooling, with hermetic sealing	
Cooling temperature	- 55 °C		- 60 °C	
Dark current	0.8 electrons/pixel/s		0.3 electrons/pixel/s	
A/D converter (High-precision readout)	14 bit	16 bit	14 bit	16 bit
Interface / Output signal (High-precision readout)	IEEE 1394-1995 / Non-compressed data (Mono 16)			
Exposure time	20 ms to 7 200 s			
External control	IIDC 1394-Based Digital Camera Specification Ver.1.30			
Sub-array	Yes			
External trigger	Yes			
Contrast enhancement	1, 4, 16 times (High-precision readout) / 1 to 6 times (High speed readout)			
Lens mount	C-mount			
Line voltage	AC 100 V / AC 117 V / AC 220 V / AC 240 V, 50/60 Hz			
Power consumption	approx. 220 VA			
Ambient storage temperature	-10 °C to + 50 °C			
Ambient operating temperature	0 °C to + 40 °C			
Ambient operating/storage humidity	70 % max. (with no condensation)			


* Calculated from the ratio of the full well capacity and the readout noise.

DIMENSIONAL OUTLINES (Unit: mm)


- Hermetic vacuum sealed air-cooled head (approx. 2.5 kg)

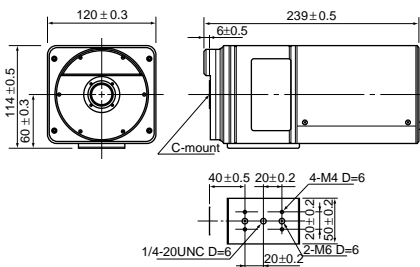


- Camera controller (approx. 8.5 kg)

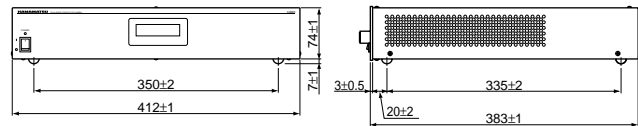

- Hermetic vacuum sealed water-cooled head (approx. 2.5kg)

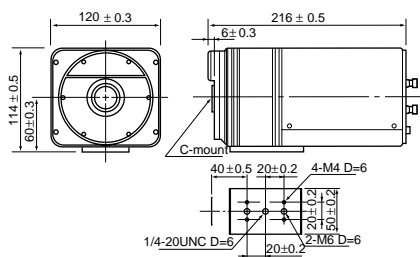

- Camera controller (approx. 8.5 kg)

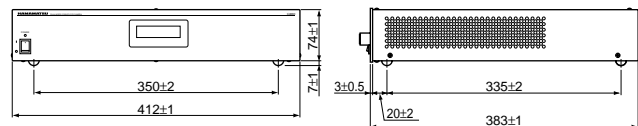

★ Product and software package names noted in this documentation are trademarks or registered trademarks of their respective manufacturers.

- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.
- Specifications and external appearance are subject to change without notice.

© 2003 Hamamatsu Photonics K.K.

HAMAMATSU

Homepage Address <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Systems Division
812 Joko-cho, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail: export@sys.hpk.co.jp

U.S.A. and Canada: Hamamatsu Photonic Systems: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-1116, Fax: (1)908-231-0852, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, U.K., Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Mois, 1/E 20020 Arese (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

Cat. No. SICS1108E02
MAY/2003 HPK
Created in Japan (PDF)